

塑料空气枪

用于通过吹气来进行的干燥、冷却、清扫操作
及包装、封装时的空气注入

For drying, cooling, cleaning, packing by air blow
For air injection in packaging


Plastic air duster

标准喷嘴
(最小口径: $\phi 3 \times 1$ 孔)
Standard nozzle
(Minimum calibre: $\phi 3 \times 1$ hole)

喷嘴连接部位 (M14 P=1.0外螺纹)
可以拆下, 选择安装附件
Nozzle connecting part
(M14 P=1.0 external thread)
Option attachment possible

随手可调的设计
可轻松调节流量!
※以目标柱为标准对流量进行调节

Easily adjustable on hand!
Dial adjustment of air fluid rate
※ Adjustable based on a guide



不容易感到疲劳的扳式设计
Hand-friendly and tireless lever type

塑料空气枪

轻量设计(90g)

空气入口G(PF)1/4内螺纹
标准配备JS-02接头
可对接头进行更换
Air intake G(PF)1/4 internal thread
JS-02 plug standard equipment
Nipple replacement possible

长时间作业时, 轻便易操作, 即使与加工物接触也不易使其划伤。
喷枪独特的结构设计, 流体通道无任何金属, 更适合于氮气的操作。
尤其推荐在女性多的工作现场使用! 可以减轻作业负担。

When touching, it doesn't scratch on object and it is handy under long time work because of light weight.
Unique structure design of spray gun, The fluid channel has no metal, More suitable for nitrogen operation.
It is most recommendable to work place with many women! It lightens the work burden.

规格 Spec.

JHG-2

重量: 90g
适用流体: 空气
常用使用压力: 0.98MPa (10kgf/cm²) 以下
最高使用压力: 1.47MPa (15kgf/cm²)
使用环境温度: 0~50℃ (32~122°F)
喷射力: 可调节范围40~290L/min (0.5MPa状态下)
包装形式: 10pcs/箱 (各吸塑包装独立包装)

Weight: 90g Adapted fluid: Air
Working pressure: under 0.98Mpa(10kgf/cm²)
Max.working pressure: 1.47MPa(15kgf/cm²)
Working atmosphere: 0~50℃(32~122°F)
Discharge rate: 40~290L/min. adjustable(at 0.5MPa)
Packaging: 10pcs/box(each blister pack individually)

■ 90%以上的材质为PP(聚丙烯)树脂

★为保护环境, 尽量减少使用金属零件。

■ 配备流量调节功能

吐气量可调节范围为40~290L/min(0.5MPa状态下)

■ Using PP(polypropylene) more than 90% of the material

★for environment friendly procedure, we reduced to use metallic parts to the utmost limit.

■ With function of fluid rate adjustment

Adjustable at the discharge rate 40~290L/min.(at 0.5 MPa)

★本说明书中记载的内容、构造、为改良考虑可能会在事先不通知的情况下进行更改。

★本说明书中记载的数据、数值皆是选定机型时用来参考的技术支持。但是, 仅凭这些数据还不足以保证产品本身, 请顾客对此有所知晓。

★Regarding contents and specification described in this catalogue, there is some changes for improvement without any preinformation.

★All data and figures described in this catalogue are prepared for the technical reference at decision of model. Please understand it previously.



具有强力、节能、低噪音、安全等特点的选配件

Accessories with strong, energy saving, low noise, safety and other characteristics


长喷嘴、喷雾喷嘴、中空纤维膜过滤器

Long nozzle、Jet nozzle、Hollow fiber membrane filter

配件的种类 Types of accessories	型号 Types	适配器 Adapter
PP树脂材料的长喷嘴(140mm) Long nozzle of PP resin material 	TLN-140	不要 NO Adapter
铝材料的长喷嘴 (200、300mm) Long nozzle for aluminum material 	TLN-2	
	TLN-3	
喷雾喷嘴 Spray nozzle 	FL-600E	AD-1/4
	FL-600R	
	EJ-F0100	
	FL-600W	
中空纤维膜过滤器 Hollow fiber membrane filter 	TF-10N	不要 NO Adapter



可对接头进行更换

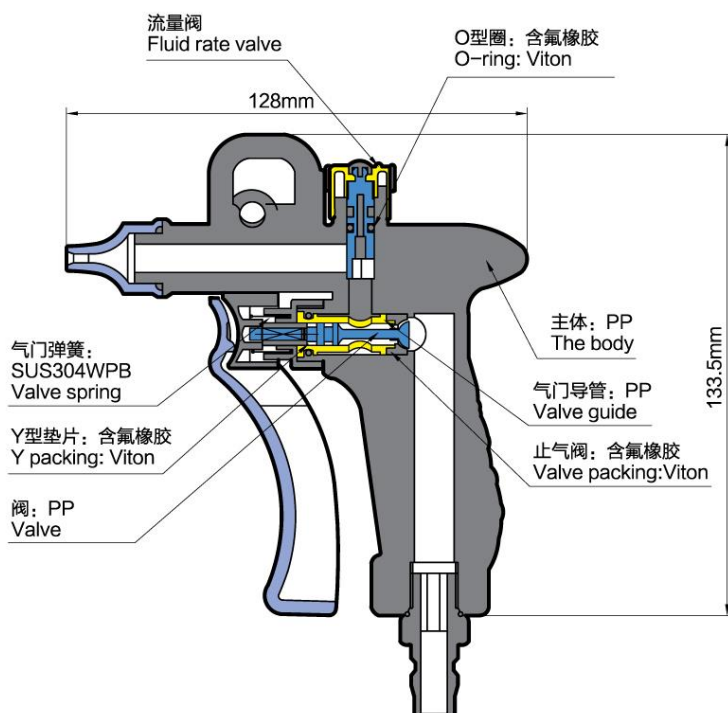

另配 G(PF)1/4双外螺纹接头 Standard attachment G(PF)1/4

External nipple of the both sides

请在连接线圈软管T-805, T-808时, 连接另一端为1/4外螺纹时使用

Please use this when connecting with coil hose T-805, T-808 or connecting side is 1/4 internal thread.

另配 R(PT)1/4外螺纹转螺母型接头 Selling Separately R(PT)1/4 External threaded nut type joint

可连接4*6, 5*8, 6.5*10, 8*12, 9*15规格的软管, 这种属于固定式连接。Flexible hose for connecting 4*6, 5*8, 6.5*10, 8*12 and 9*15. This connection is not easily disconnected.



圆型静音喷嘴 Round silent nozzle

大风量、重量轻的消音喷嘴（降噪20%！）


Nozzle with large air volume and light weight (noise reduction 20%)

静音

拥有控制空气扩散构造，实现低能耗吹气作业。

Controlling air diffusion structure, Low energy consumption blowing operation.

型号Model	RN-1608A
材质Material	PP(聚丙烯)
重量Weight	4g
适用流体Adapted fluid	水/气
正常使用压力Working pressure	1.0Mpa以下
最高使用压力Max. working pressure	1.5Mpa
使用环境温度Working atmosphere	0~50℃(32~122°F)
接口Connection	M14 P=1.0
吹出中径Discharge bore	Φ0.8×16孔(hole)
包装Packaging	10pcs/box

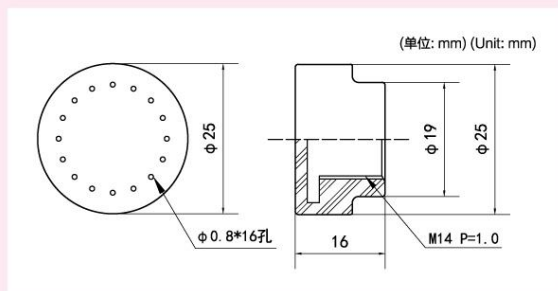

喷气喷嘴具有各种各样的用途、其实现了降低噪音、具有精准且强大的喷射力、节能等。喷气喷嘴的效果被用在工厂内的空气配管等各个领域。

主要用途

- 清扫加工机械基准面（油、切削粉末）
- 向压铸模具吹入空气
- 去除及烘干部件、清洁机的水分
- 油漆展台用水清洗后进行烘干
- 清扫热压模具
- 用于降噪用的消声器

Jet nozzle is used at the various situations under air piping in plant for realization of noise countermeasure, accurate and strong blowing power and energy saving.

- Main usage**
- Cleaning of reference plane of processing machine (oil, chips)
 - Draining, drying of parts, cleaner
 - Die cleaning of hot press
 - Air blow of die-casting die
 - Draining and drying of paint spraying booth
 - Silencer of noise reduction

在作业前 去除灰尘

在进行洗车、保养等工作前使用可提高
工作效率

Dust removing before work


For effective work by this treatment before car washing, repairing!



使用实例 洗车后的 水滴飞溅

在进水的地方推荐
使用FL-600R

Usage example Water drop blowing after car washing
Recommend FL-600R for complicated place

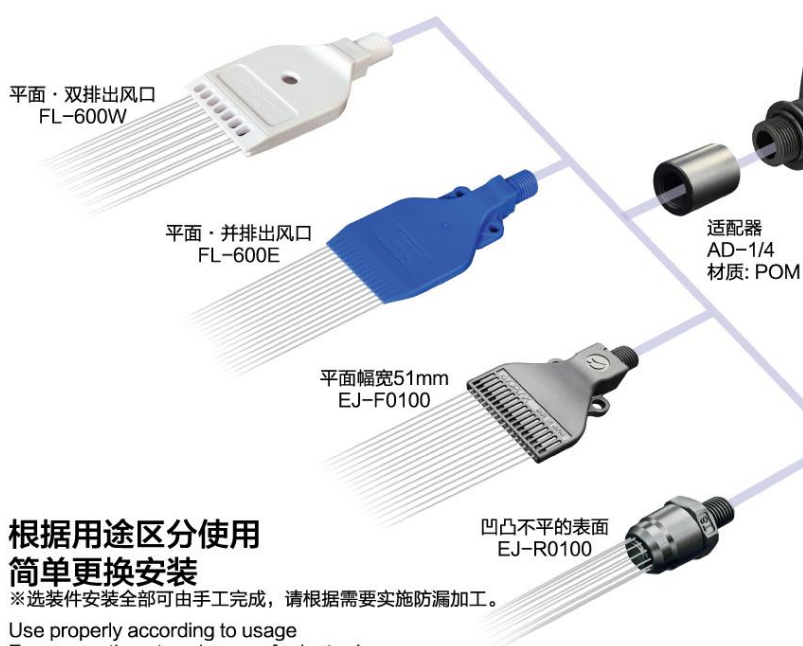

根据用途区分使用 简单更换安装

※选装件安装全部可由手工完成，请根据需要实施防漏加工。

Use properly according to usage
Easy mounting at exchange of adaptor!
Hand work is enough to mount option.

※Please do seal processing as necessary.

适配器 AD-1/4

重量 Weight: 7g
颜色 Color: 黑色 black
适用流体 Adaptive fluid: 气 air
材质 Material: POM
接口 Connection lip: G1/4转M14 P=1.0
适合配件 Adaptable option:
FL-600E, FL-600R, EJ-F0100,
FL-600W, EJ-R0100

安装选配件
的一侧
Mounting side
of option



安装枪
的一侧
Mounting side
of JHG-2

M14 P=1.0
G1/4

型号Model	EJ-F0100	FL-600E
适用流体Adaptive fluid	空气Air	
材质Material	PPS	POM
常用使用压力Working pressure	0.7MPa	0.98MPa
使用环境温度Working atmosphere	0~130℃ (0.5MPa)	0~50℃
重量Weight	23.5g	22g
连接口Connection	R (PT) 1/4外螺纹 External thread	
吹出口径Discharge bore	Φ1×16孔 hole	


长喷嘴 Long nozzle

包装，封装时注入空气等场合使用，狭窄及深凹处吹气作业时使用。
Suitable for air blow working to secluded and narrow space such as air injection in packing, packaging.

超轻PP树脂(7g)制长喷嘴，
即使与加工物触碰也不容易使其损伤。
When touching, it doesn't scratch on object,
ultra-lightweight(7g) PP long nozzle.

型号Model	TLN-140
材料Material	聚丙烯polypropylene
全长Full length	140mm
重量Weight	7g
连接Connection	M14 P=1.0外螺纹internal thread
喷射口径Discharge bore	Φ2×1孔hole
包装状态Packaging state	10pcs/lot

无需适配器！
将枪体的标配喷嘴取下，直接安装上长喷嘴即可。
Adaptor unnecessary!
Remove standard nozzle and then only replace.

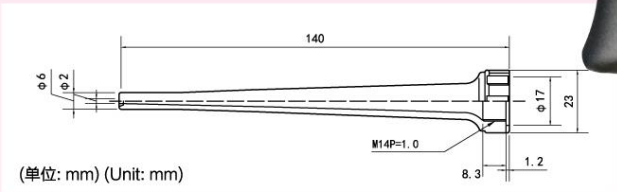


(单位: mm) (Unit: mm)

超轻铝制长喷嘴
Ultra-lightweight, Aluminum long nozzle



可接上塑料安全防护罩(SL-590)
Plastic safety shield(SL-590) is possible to be used.

无需适配器！
将枪体的标配喷嘴取下，
直接安装上长喷嘴即可。
Adaptor unnecessary!
Remove standard nozzle and
then only replace.

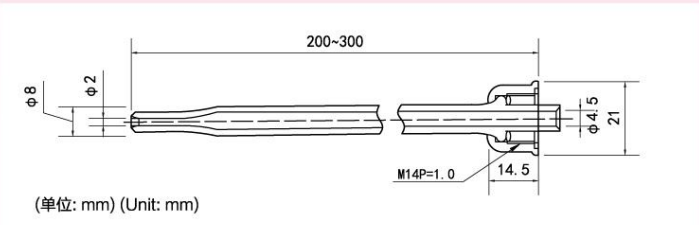

(单位: mm) (Unit: mm)

型号Model	TLN-2	TLN-3
材料Material	铝Aluminum	
全长Full length	200mm	300mm
重量Weight	20g	30g
连接Connection	专用盖dedicated cap	
喷射口径Discharge bore	Φ2×1孔hole	
包装状态Packaging state	10pcs/lot (吸塑包装独立包装) blister pack individually	

★本说明书中记载的内容、构造、为改良考虑可能会在事先不通知的情况下进行更改。
★本说明书中记载的数据、数值皆是选定机型时用来参考的技术支持。但是，仅凭这些数据还不足以保证产品本身，请顾客对此有所知晓。
★Regarding contents and specification described in this catalogue, there is some changes for improvement without any preinformation.
★All data and figures described in this catalogue are prepared for the technical reference at decision of model. Please understand it previously.

中空纤维膜过滤器 Hollow fiber membrane filter

精密机械、印刷、涂装、光学零件等空气吹风、空气管道布置及其他一般产业使用。
过滤精度为0.01 微米的中空纤维膜过滤器。

For air blow of precision machine, printing, painting, food, optical parts related etc. air piping, and other industries.
Hollow fiber membrane filter of filter precision 0.01micron meter



please use in the case of 1/4 external thread at the other side

型号Model	过滤器单体 TF-10N stand-alone unit	带适配器 TF-10N-2 adaptor attached
适用流体 Adaptive fluid	空气 Air	
材质 Material properties	外壳: PA 中空纤维膜: PP Case: Pa Hollow fiber membrane filter: PP	
耐压 Working pressure	0.49MPa (5kgf/cm ²)	
使用环境温度 Working atmosphere	0~50℃ (32~122°F)	
重量 Weight	15g	25g
连接口 Connection	M14 P=1.0 外螺纹 external & internal thread	G (PF) 1/4 双内螺纹 the both of internal thread
膜面积 Membrane size	80cm ²	
过滤精度 Filter precision	0.01 μ	
包装状态 Packaging	2pcs/Box	

将管道中流出的水、杂质、油等过滤，提供清洁的空气环境。
请用作主过滤系统的辅助设备部件。

Provision of clean air atmosphere by shutout of water, impurities, oil.
please use as support of main filter system.

不需要适配器

Unnecesity of adaptor!

Easy mounting only by setting TF-10N during
and standard nozzle.
※Please do seal processing as necessary.

注意!


中空纤维膜过滤器的使用压强为0.49MPa(5kgf/cm²)以下。

- ★ 本产品是为过滤管道最终阶段产生的水、油、杂质而设计开发，请将本产品用作主过滤系统的辅助设备。若作为主过滤系统使用，可能发生网堵塞丧失基本功能等情况。
- ★ 过滤系统的使用寿命根据使用条件状况有所不同。并且，由于可能发生中空纤维膜损坏的情况，请不要逆流清洗。
- ★ 请不要对着人体、特别是脸部、眼部使用。

Attention!

Hollow fiber membrane filter can be used under the pressure of 0.49Mpa(5kgf/cm²).

- ★ This product is developed for the purpose to cut water, oil, impurities at the last stage of air piping. Then please use as supporter of main filter. If using as main filter, it doesn't work sometimes because of clogging.
- ★ The life span of filter may be dependant on the use condition, state etc. Don't do reverse flow washing because damage of hollow fiber membrane might be caused.
- ★ Don't point it at human body, especially face, eye ect.

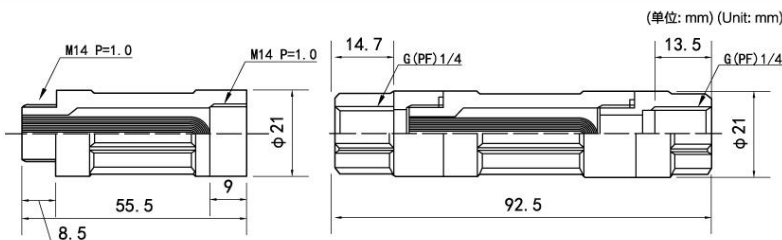

线圈软管 Coil hose

有效使用作业空间，在一定范围内伸长
不容易拉伸变形的高持久性、信赖性线圈软管
High durability and high reliability coil hose having no loose vice




为了操作的方便，我们将产品的规格分为4M、6M两种。
两种规格接口连接后即可马上使用。

2 sizes of 4m and 6m are prepared, by which you can work freely.
2 kinds of connective part are prepared and then you can use it at once.



适用流体 Adaptive fluid	空气 Air
材料 Material properties	聚氨酯 (黄颜色) Polyurethane (yellow)
软管尺寸 Hose size	Φ5 × Φ8 (内径 × 外径) (inside diameter × outside diameter)
常用使用压力 Working pressure	0.7MPa (≈ 7kgf/cm ²)
使用环境温度 Working atmosphere	0~60℃ (32~140°F)
包装状态 Packaging	1pcs/lot (独立包装袋入) (sacked individual packaging)

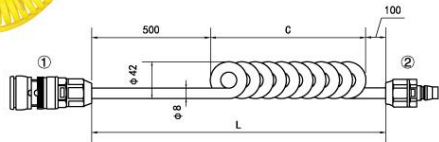

Model 型 式	Operation range 使用范围	Weight(g) 重量(g)	Connecting Part 连接部分	(单位:mm)(Unit:mm)	
				C	L
T-805J	4m	260	① TN-5NR JOST插座 JOST socket	400	1000
T-808J	6m	350	② JN-5N JOST插头 JOST plug	630	1230

注意! • 请不要长期放置在野外。• 插头在插入状态下请不要故意扭转、持续扭转。

Attention! • Don't leave it long in outdoor. • don't rotate it intentionally or continuously under connecting state.